

LANDSCAPE PROTECTION

INSPIRATIONAL HVM
SOLUTIONS WITH
INNER STRENGTH
AND OUTER BEAUTY

KEEPING PEOPLE **SAFE... NOT SCARED**



Marshall's

Creating Better Spaces

ABOUT MARSHALLS

Marshalls has been manufacturing hard landscaping materials for over 130 years and has become the leading supplier of products that create our urban environment. This has been achieved through progressive product innovation and demonstration of outstanding customer service levels. This privileged position will be sustained by continuous investment in the Marshalls brand, the products, and the people.

At Marshalls, we work together as one team, guided by strong principles, to operate in the most ethical and sustainable ways. We do the right things, for the right reasons, in the right way. **This is the Marshalls Way:**

ACT WITH COURAGE

We Act with Courage by taking responsibility for every action. We persevere and face things head on with a 'can do' attitude. We're proud of our depth of experience, but we're humble enough to never stop learning.

WE WIN TOGETHER

We Win Together by continuously developing our business and our Marshalls people. We strive to meet the needs and expectations of our customers and stakeholders. We break down boundaries by pro-actively proposing solutions, and we do this together with respect for each other.

SHAPE THE FUTURE

Operating in the most ethical and sustainable way is a commitment we make to our customers, partners, stakeholders and the communities where we operate. We keep this commitment by considering the long term impact of every single decision we make. We recognise that we can Shape the Future by putting people, communities and the environment first. We don't take our lead from change, we initiate and embrace change.

INSPIRE WITH CLEAR PURPOSE

We set clear expectations for those we work with and for ourselves. We Inspire with Purpose, letting our passion and pride shine! We're motivated by our own high standards to deliver market leading quality to our customers. We know that brilliance comes from every single one of our people being able to contribute to our vision of Creating Better Spaces and Futures for Everyone.

Act with courage

Win together

Shape the future

Inspire with clear purpose



"SECURITY PRODUCTS **DON'T** NEED TO **COMPROMISE** ON THE **AESTHETICS OF A LANDSCAPING PROJECT.**"

LANDSCAPE PROTECTION

Marshalls Landscape Protection offers a design led approach of Secured by Design Hostile Vehicle Mitigation security products enabling highly effective protection to blend seamlessly into urban landscape design; allowing architects, planners and designers to install security measures without instilling fear.

In most cases, crash-tested products are developed with minimal consideration given to the design, however Marshalls have flipped this on its head and taken a range of aesthetically designed street furniture products and incorporated protective RhinoGuard® technology within to create inner strength and outer beauty.



Our products are manufactured and tested to the latest security accreditations in the UK, with additional Street Furniture products sourced from Europe. From planters, seating and cycle stands, to litter bins, bollards and much more, the portfolio presents a comprehensive collection of creative HVM solutions available in a range of materials, from mild and stainless steel, natural stone, concrete and Ferrocast® to FSC®-certified timber and more.

*We believe in the importance of creating safe, attractive and inviting environments, and regenerating spaces where people want to spend time, where people feel **safe... not scared.***



Proudly celebrating over 10 consecutive years as a Superbrand



Our developments in design, manufacture and technology negate the need for bulky and obtrusive security, enabling those who design our city spaces to think more creatively about how they can include Hostile Vehicle Mitigation within landscape design features. Marshalls' integrated Landscape Protection approach involves the application of **creative thinking**, using our engineering and design know-how to create spaces that are **safer by design from the outset.**



CONTENTS

INTRODUCTION		PROTECTIVE BOLLARDS	
About Marshalls & Landscape Protection	02	RhinoGuard® Product Options Overview	34
Protective, Aesthetically Pleasing Security	04	RhinoGuard® Decorative Sleeves	36
		RhinoGuard® Natural Stone Sleeves	37
PROTECTIVE SEATING		RhinoGuard® Bespoke Sleeves	38
RhinoGuard® EOS	06	RhinoGuard® Ultra Shallow 50™	40
RhinoGuard® Igneo	08	RhinoGuard® Super Shallow 100™	41
RhinoGuard® Kirkos	10	RhinoGuard® Standard Sleeve Options	42
RhinoGuard® RhinoBlok	12	RhinoGuard® PAS 170 Bollards	43
RhinoGuard® Olimpo (seat / planter combined)	14	PROTECTIVE STREET FURNITURE	
PROTECTIVE PLANTERS		RhinoGuard® GEO	44
RhinoGuard® Olimpo (seat / planter combined)	14	PROTECTIVE AUTOMATED PRODUCTS	
RhinoGuard® Universo	15	RhinoGuard® Automated Products	45
RhinoGuard® Large Giove	16		
RhinoGuard® Small Giove	17	PROTECTIVE MODULAR SOLUTIONS	
RhinoGuard® Square	18	RhinoGuard® Redi-Rock™ Wall	46
RhinoGuard® Rectangle	19	RhinoGuard® Titan Kerb	47
RhinoGuard® Timber & Steel	20	ADDITIONAL INFORMATION	
RhinoGuard® RhinoBlok	21	Protective Solutions For All Environments	48
RhinoGuard® Cristina	22	Design & Engineering Capability	50
RhinoGuard® Classica 1220	24	Project Management	51
RhinoGuard® Classica 1620	25	Security Accreditations Explained	52
RhinoGuard® Saturno	26	International Standards Comparison	54
RhinoGuard® Esile	27	Security Ratings Explained	55
RhinoGuard® Orione	28		
RhinoGuard® Pegaso	29		
PROTECTIVE TEMPORARY SOLUTIONS		PROTECTIVE POST & RAIL	
RhinoGuard® Steel GateKeeper®	30	RhinoGuard® Post & Rail	32
RhinoGuard® Concrete GateKeeper®	31		

PROTECTIVE, AESTHETICALLY PLEASING SECURITY

The terror threat posed to the public has evolved dramatically over the last few years. Large-scale, meticulously planned bomb attacks have given way to vehicle assaults that target pedestrians. Our products help protect and enhance our landscape environments, safeguarding people, buildings and the spaces they occupy from multiple levels of threat, whether they are accidental collisions, criminal ram-raids or terrorist attacks.

We believe that those in charge of specifying for security must assign a greater role to design aesthetics when it comes to choosing products to prevent vehicle attacks.

Concrete blocks and barricades have previously been common methods of security used to protect areas of high footfall, such as city centres, airports and sports stadiums. These approaches of security make spaces feel hostile and heavily defended.

Ideally, protective measures should be so well integrated into scenes that uninitiated passers-by don't realise they have been put in place for their protection, keeping people **safe... not scared.**



INNER STRENGTH AND OUTER BEAUTY

RHINO GUARD® EOS

The multi-purpose RhinoGuard® protective EOS seat combines form, function and strength, offering not just a contemporary seating solution, but also security and resilience for a range of applications.

The seat frame has been successfully crash tested at 3 different scenarios using a 7.5 tonne vehicle travelling at 30mph, giving full reassurance of its inner strength.

Constructed using Iroko timber and Ferrocast®, known for its resilience, a variety of looks can be achieved with a range of colour options, in order to suit the requirements of any scheme.

SECURITY SPECIFICATIONS

PAS 68

7.5 Tonne

30 MPH

V/7500(N2)/48/90:3.1/0.0
Rear impact test

V/7500(N2)/48/90:0.0/0.0
Front impact test

V/7500(N2)/48/90:2.7/0.0
Gap impact test with bollard



PROTECTIVE SEATING



Decorative


Ferrocast®
Seat ends available in any standard RAL colour. Bespoke design options are also available.

Timber
Untreated Iroko slats.

Mild Steel
Front and back panels with the option of powder coating in any standard RAL colour.



Original

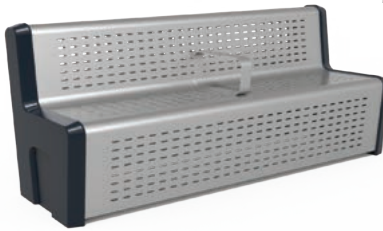

Manhattan



Natural Stone






MATERIALS / COLOURS

Ferrocast®



Natural Stone




Mild Steel



Overall Height Above Ground (mm)	887	Foundation Type	Reinforced Concrete
Overall Height Including Root (mm)	1237	Foundation Length x Width x Height (mm)	2400 x 1000 x 430
Seat Height (mm)	460	Weight (kg)	190
Length x Width (mm)	1265 x 678		

PROTECTIVE SEATING

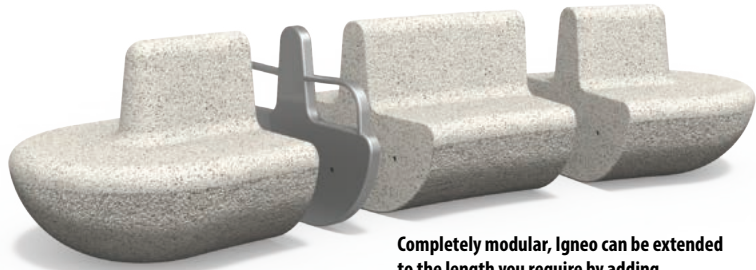


Completely modular, Igneo can be extended to the length you require by adding additional centre pieces, making it suitable for any space.

Precast Concrete
Available in options shown.

Mild Steel
Front and back panels with the option of powder coating in any standard RAL colour.

MATERIALS / COLOURS

Standard RAL Powder Coated Colours

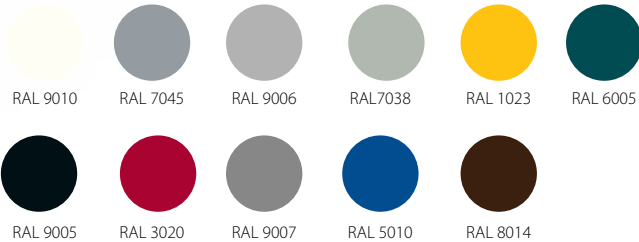

Precast Concrete



Overall Height Above Ground (mm)	874	Foundation Type	Reinforced Concrete
Overall Height Including Root (mm)	1159	Foundation Length x Width x Height (mm)	2400 x 1600 x 500
Seat Height (mm)	474	Weight (kg)	Ferrocast Arm 21.5 End Section 1000 Middle Section 1200
Length x Width (mm)	*3017 x 1240		

*Igneo can be extended to the length you require with 3017mm being the minimum length.

RHINO GUARD® IGNEO

Vehicular-borne threats are a reality in many modern urban environments and with the RhinoGuard® Igneo Protective Seat, safety and security combined with a subtle visual appeal can be achieved.

Crash tested on two occasions, pinpointing different locations of the seat, Igneo can successfully withstand impact from a 7.5 tonne vehicle travelling at 40mph.

Manufactured using precast concrete, Igneo is available in 4 colour variations, all finished with an anti-graffiti coating. The optional armrests are manufactured using Ferrocast®, known for its resilience. These are available in a range of RAL colours in order to achieve the look you desire.

SECURITY SPECIFICATIONS

PAS 68



V/7500(N2)/64/90:3.7/0.0
Front impact test

V/7500(N2)/64/90:3.5/0.0
Gap impact with bollard test



RHINO GUARD® KIRKOS

The Kirkos seating range provides a simple, yet effective way of enhancing any environment whilst providing the appropriate level of protection required.

Incorporated around a single or double bollard array, Kirkos is manufactured using FSC®-certified Red Grandis Hardwood, and finished with a decorative, mild steel feature which is available in a range of colour options.

Kirkos is durable and weather resistant and offers a long-lasting, low maintenance seating solution.

SECURITY SPECIFICATIONS


7.2 Tonne

50 MPH

**Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification



PROTECTIVE SEATING

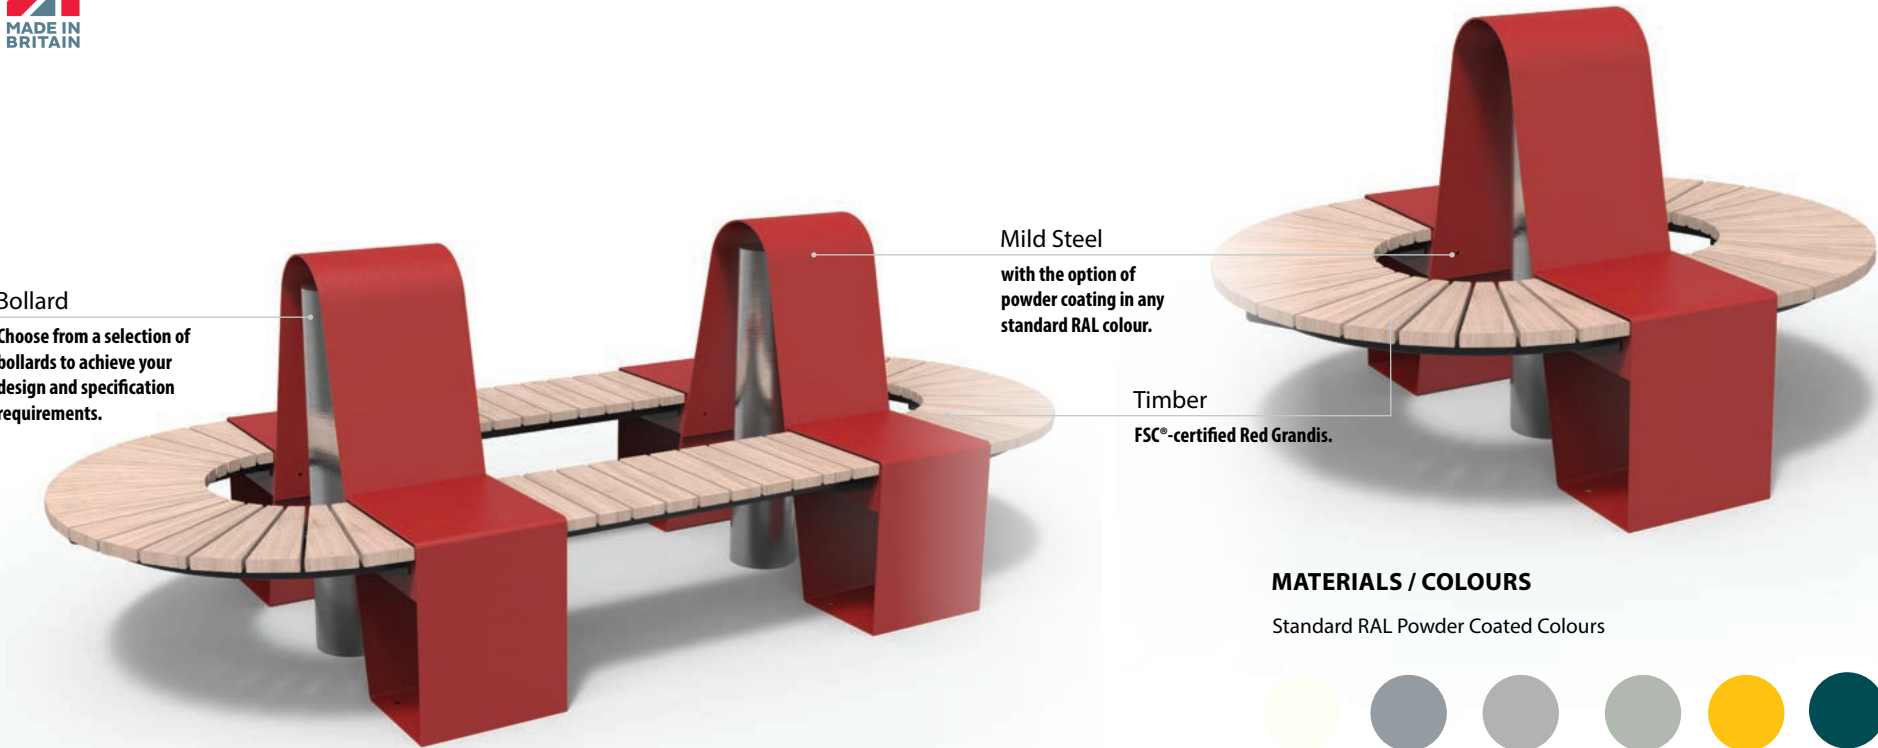

RhinoGuard® Double Hoop Seat

Overall Height Above Ground (mm)	1090	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Seat Height (mm)	500	Weight (kg)	320
Length x Width (mm)	3130 x 1370		

*Dependent on core selection see page 34 - 35 for options

RhinoGuard® Single Hoop Seat

Overall Height Above Ground (mm)	1090	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Seat Height (mm)	500	Weight (kg)	115
Length x Width (mm)	1740 x 1370		

*Dependent on core selection see page 34 - 35 for options

MATERIALS / COLOURS

Standard RAL Powder Coated Colours

RAL 9010

RAL 7045

RAL 9006

RAL7038

RAL 1023

RAL 6005

RAL 9005

RAL 3020

RAL 9007

RAL 5010

RAL 8014

Timber
FSC®-certified
Red Grandis

FSC® C133609

The mark of responsible forestry

Protective Seating

Landscape Protection

Marshalls.co.uk/landscapeprotection

10

Protective Seating

Landscape Protection

Marshalls.co.uk/landscapeprotection

11

PROTECTIVE SEATING



Concrete
Silver Grey option.

Timber
Untreated Iroko slats.

RhinoBlok double seat 1000
with end bench 1000.



MATERIALS / COLOURS

Concrete



Silver Grey



Mid Grey

Timber



Iroko

Standard Configurations



RhinoBlok



RhinoBlok
Timber top



RhinoBlok
Timber end bench 1000



RhinoBlok
Timber single bench 1600



RhinoBlok
Timber double bench 1600



RhinoBlok
Timber end seat 1000



RhinoBlok
Timber triple bench 1000



RhinoBlok
Timber single seat 1600



RhinoBlok
Timber double seat 1600

RHINOBLÖK	
Overall Height above ground (mm)	580
Overall Height Including Root (mm)	710
Seat Height (mm)	580
Length x Width (mm)	1600 x 1000
Foundation Type	Precast Concrete
Foundation Length x Width x Height (mm)	2120 x 1520 x 200
Weight (kg)	2500

TIMBER TOP	
Length x Width x Height (mm)	1600 x 1000 x 50
Weight (kg)	50

BENCH 1000	
Length x Width x Height (mm)	1000 x 460 x 460
Seat Height (mm)	630
Weight (kg)	35

BENCH 1600	
Length x Width x Height (mm)	1600 x 460 x 460
Seat Height (mm)	630
Weight (kg)	50

SEAT 1000	
Length x Width x Height (mm)	1000 x 515 x 805
Seat Height (mm)	630
Weight (kg)	45

SEAT 1600	
Length x Width x Height (mm)	1600 x 515 x 805
Seat Height (mm)	630
Weight (kg)	65

CREATE **YOUR DESIRED CONFIGURATION**
USING A VARIETY OF SEATING ELEMENTS



RhinoBlok
Timber seat 1600



RhinoBlok
Timber bench 1600



RhinoBlok
Timber seat 1000



RhinoBlok
Timber bench 1000



RhinoBlok
Timber top



RhinoBlok

RHINO - BLOK

Providing inner strength and outer beauty, the RhinoGuard® RhinoBlok seating is available with a choice of timber clad seat and bench variations, providing the perfect solution to protect people, places and infrastructure without compromising on the appearance of the space. The Blok can also be used as the central core of a planter, offering the perfect addition to compliment the range.

SECURITY SPECIFICATIONS

IWA14.1



V/7200(N2A)/64/90:19.3

RHINO GUARD®
RHINOBLÖK TIMBER
DOUBLE BENCH 1600

RHINO GUARD®
RHINOBLÖK PLANTER

RHINO GUARD® OLIMPO

Olimpo combines functionality and beauty.

Manufactured using reconstituted natural marble stones or white granite, the seat and planter combined is available with a polished or bush hammered finish for a glossy or rough appearance, providing the perfect solution for classic and modern urban environments.

Available with a choice of security ratings to suit the requirement, Olimpo is offered with or without the back rest element and in a range of colour options, allowing a range of aesthetic design options to be achieved.

SECURITY SPECIFICATIONS

1.5-7.2 Tonne

50 MPH

**Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification.

This is an engineered solution based around our current offering of tested products.

SEATING / PLANTER

MATERIALS / COLOURS

Precious Stone


Rosso Verona


Bianco Carrara


Botticino


Giallo Mori


Veneziano


Porfido


Verde Alpi


Nero Ebano

Concrete


White Granite

Available without the 360° backrest.

Overall Height Above Ground (mm)	880	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Seat Height (mm)	480	Weight (kg)	3550
Length x Width Ø (mm)	2500		

*Dependent on core selection see page 34 -35 for options

RHINO GUARD® UNIVERSO

With its sculptured, circular form and unique style, Universo stands out in any environment.

Manufactured using sandblasted natural stone or concrete, the organic seating elements can be used singularly or combined to create a beautiful and creative space.

SECURITY SPECIFICATIONS

1.5-7.2 Tonne

50 MPH

**Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification

This is an engineered solution based around our current offering of tested products.

SEATING

MATERIALS / COLOURS

Precious Stone


Rosso Verona


Bianco Carrara


Botticino


Giallo Mori


Veneziano


Porfido


Verde Alpi


Nero Ebano

Concrete


White Granite


Grey Concrete

Overall Height Above Ground (mm)	850	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Seat Height (mm)	424	Weight (kg)	2360
Length x Width Ø (mm)	1900		

*Dependent on core selection see page 34 -35 for options

Protective Seating

Landscape Protection

Marshalls.co.uk/landscapeprotection

15

RHINO GUARD® LARGE GIOVE

The RhinoGuard® Giove planter is available in two sizes and provides an elegant HVM solution for introducing planting in to the public realm.

The planters are cast from a mix of concrete and fine Italian marble aggregates sourced from Italy. The use of high-quality natural marble ensures long term colour consistency. Each planter can either be polished during manufacture to leave a smooth surface, or bush hammered for a rough appearance.

SECURITY SPECIFICATIONS

PAS 68

7.5 Tonne

50 MPH

V/7500(N2)/64/90:0.0/0.0
Single Frame impact test

V/7500(N3)/80/90:1.7/0.0
Single Frame impact test

V/7500(N3)/80/90:3.8/35.5
Complete Planter test

With its 1,225 litre capacity, the large Giove planter has been designed to accommodate the root ball of a tree.

PLANTERS



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

MATERIALS / COLOURS

Precious Stone



Rosso Verona



Bianco Carrara



Botticino



Giallo Mori



Veneziano



Porfido



Verde Alpi



Nero Ebano

Concrete



White Granite

Overall Height Above Ground (mm)	1100	Foundation Type	* Various
Overall Height Including Root (mm)	* Various	Foundation Length x Width x Height (mm)	* Various
Length x Width Ø (mm)	1900	Weight (kg)	3005

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® SMALL GIOVE

The RhinoGuard® Small Giove is the younger sister of the Large Giove planter. Scaled down in size, these can be used alongside one another to create a variety of layouts or individually to add a protective but aesthetically pleasing feature to any urban landscape.

The strength and durability of the material ensures performance in all climates.

SECURITY SPECIFICATIONS

1.5 - 7.2 Tonne

40 MPH

**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification

This is an engineered solution based around our current offering of tested products.

PLANTERS



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

MATERIALS / COLOURS

Precious Stone



Rosso Verona



Bianco Carrara



Botticino



Giallo Mori



Veneziano



Porfido



Verde Alpi



Nero Ebano

Concrete



White Granite



Grey Concrete

Overall Height Above Ground (mm)	735	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width Ø (mm)	1500	Weight (kg)	1500

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® SQUARE

Like the RhinoGuard® Rectangle planter, the square variant provides a durable and aesthetically pleasing Hostile Vehicle Mitigation solution.

Available in a range of colour variations and finishes, the planter has a solid construction and requires little maintenance.



SECURITY SPECIFICATIONS



1.5 - 7.2 Tonne



50 MPH

****Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification**

This is an engineered solution based around our current offering of tested products.

PLANTERS



MATERIALS / COLOURS

Precious Stone



Rosso Verona



Bianco Carrara



Botticino



Giallo Mori



Veneziano



Porfido



Verde Alpi



Nero Ebano

Concrete



White Granite



Grey Concrete

Overall Height Above Ground (mm)	950	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width (mm)	1100 x 1100	Weight (kg)	977

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® RECTANGLE

The RhinoGuard® Rectangle planter provides an economical and flexible way to enhance an urban landscape with natural elements whilst the durability and strength of the material ensures performance in all climates.

The robust geometric construction allows the planter to be strategically placed to restrict vehicular access and guide pedestrian flow, providing a practical yet decorative addition to any landscape project.



SECURITY SPECIFICATIONS



1.5 - 7.2 Tonne



50 MPH

****Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification**

This is an engineered solution based around our current offering of tested products.

PLANTERS



MATERIALS / COLOURS

Precious Stone



Rosso Verona



Bianco Carrara



Botticino



Giallo Mori



Veneziano



Porfido



Verde Alpi



Nero Ebano

Concrete



White Granite



Grey Concrete

Overall Height Above Ground (mm)	950	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width (mm)	1800 x 700	Weight (kg)	1265

* Dependent on core selection see page 34 - 35 for options

RHINO GUARD® TIMBER & STEEL

The RhinoGuard® square planters provide a simple specification consisting of a mild steel frame with the option of hardwood or steel panels making this the ideal solution for schemes where quality, design and durability are key requirements.

The heavy-duty steel frame supports are fully galvanised against rust and are available in a range of powder coated colour variations to suit the design requirements.

SECURITY SPECIFICATIONS

IWA14.1

7.2 Tonne

40 MPH

V/7200(N2A)/64/90:19.3

**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification

This is an engineered solution based around our current offering of tested products.

PLANTERS



Timber
Untreated Iroko slats.

Mild Steel
Galvanised mild steel frame.
Powder coated to any standard RAL - See Page 8.

Aluminium
Aluminium infill panels. Powder coated to any standard RAL - See Page 8.

MATERIALS / COLOURS

Timber

Mild Steel



Iroko



Overall Height Above Ground (mm)	1000	Foundation Type	*Various	
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various	
Length x Width (mm)	1200 x 1200	Weight (kg)	Timber	Steel
	1800 x 600		235	240
	1800 x 1200		220	225
			295	300

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® RHINO - BLOK

Providing inner strength and outer beauty, the RhinoGuard® RhinoBlok Planter gives a concrete block a face-lift. Using the HVM RhinoBlok as the core, the planter complements the RhinoBlok seating range shown on pages 12 - 13.

SECURITY SPECIFICATIONS

IWA14.1

7.2 Tonne

40 MPH

V/7200(N2A)/64/90:19.3

PLANTERS



Mild Steel Planter Sleeve

Mild Steel
Galvanised mild steel frame.
Powder coated to any standard RAL - See Page 8.

Aluminium
Aluminium infill panels. Powder coated to any standard RAL - See Page 8.

Timber Planter Sleeve

Timber
Iroko slats.

Mild Steel
Galvanised Mild Steel frame available with the option of powder coating to any standard RAL – See Page 8.

MATERIALS / COLOURS

Timber

Mild Steel



Iroko



RHINO BLOK STEEL PLANTER SLEEVE

Length x Width x Height (mm)	1800 x 1200 x 1000
Weight (kg)	300

RHINO BLOK TIMBER PLANTER SLEEVE

Length x Width x Height (mm)	1800 x 1200 x 1000
Weight (kg)	295

For RhinoGuard® RhinoBlok specification details or for further information on the RhinoBlok seating options please see page 12 – 13.

RHINO GUARD® CRISTINA

The Christina planter is composed of a base and two elements which are divided by a central band of copper or stainless steel which follows the full circumference of the planter.

Manufactured from precious stone or concrete, Cristina is available in a range of security ratings, providing inner strength and outer beauty and will enhance the aesthetics of any environment.

SECURITY SPECIFICATIONS




**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification
This is an engineered solution based around our current offering of tested products.



Surfaces can be polished for a shiny finish or sandblasted or bush-hammered, for a rough appearance.

PROTECTIVE PLANTERS

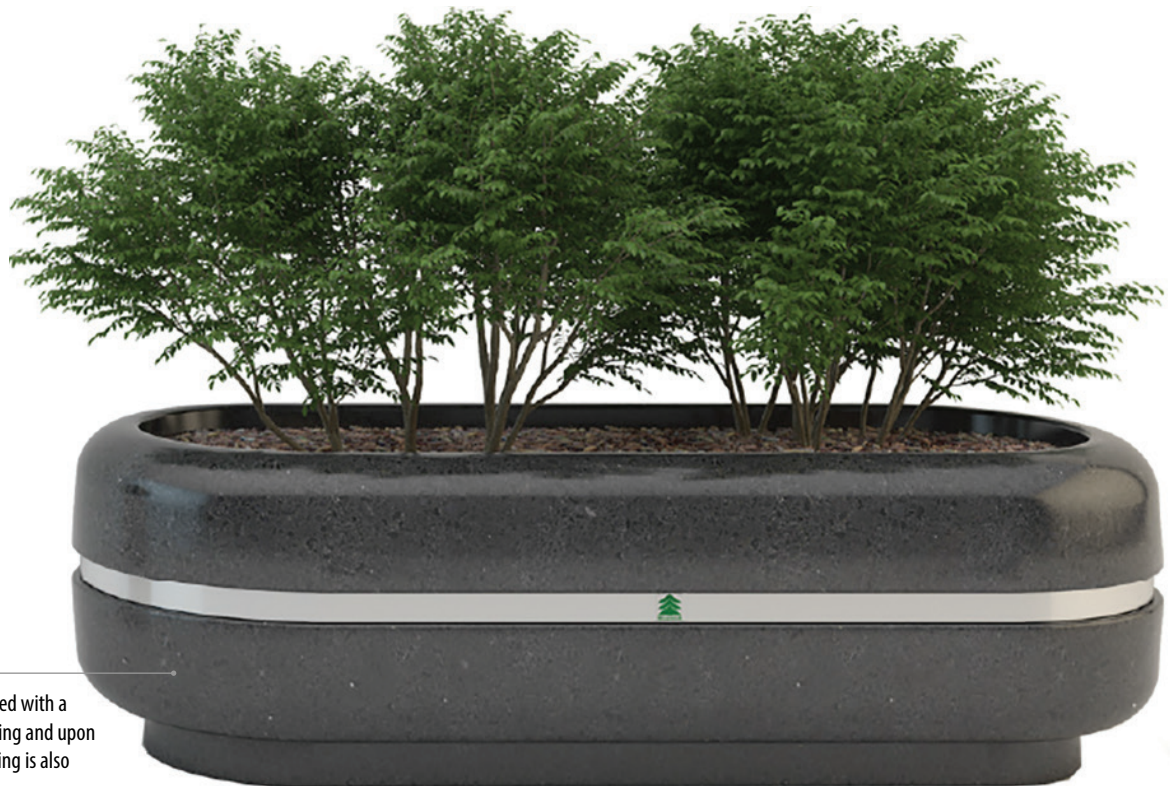


All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

Reinforced and fitted with lifting eyes for ease of handling.


Central band is available in copper or stainless steel with a satin finish treatment.

MATERIALS / COLOURS

Precious Stone



Concrete




Overall Height (mm)	600	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width (mm)	2000 x 820	Weight (kg)	880

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® CLASSICA 1220

Classica is available in two sizes - the 300 litre Classica 1220 and the 600 litre Classica 1620.

Manufactured from precious stone or concrete, the versatile, circular form of each planter is enhanced with a band of copper or stainless steel in the central groove which follows the full circumference of the planter.

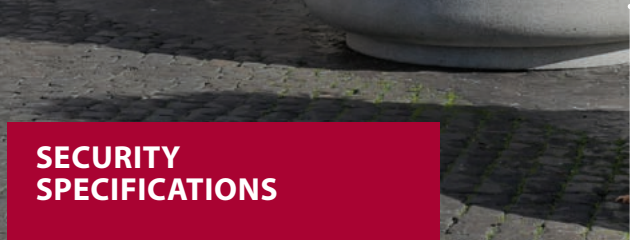

Surfaces can be polished for a shiny finish or sandblasted or bush-hammered, for a rough appearance.

SECURITY SPECIFICATIONS


1.5 - 7.2 Tonne

40 MPH

**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification

This is an engineered solution based around our current offering of tested products.

PLANTERS

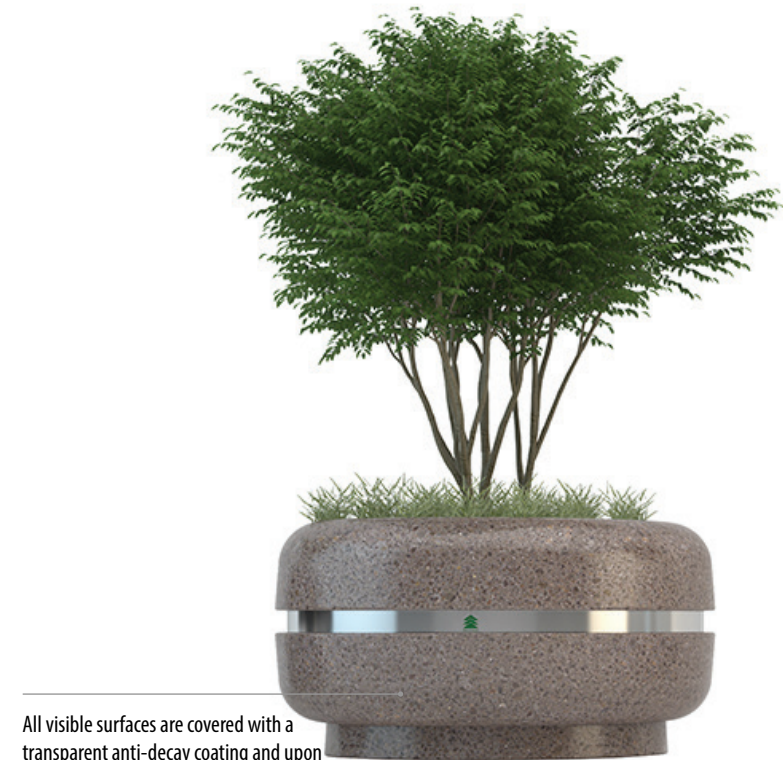

All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

MATERIALS / COLOURS

Precious Stone

- Rosso Verona
- Bianco Carrara
- Botticino
- Giallo Mori
- Veneziano
- Porfido
- Verde Alpi
- Nero Ebano

Concrete

White Granite

Grey Concrete

Overall Height Above Ground (mm)	650	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width Ø (mm)	1220	Weight (kg)	910

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® CLASSICA 1620

Manufactured from precious stone or concrete, the Classica planters are available in a range of security ratings, providing inner strength and outer beauty and will enhance the aesthetics of any environment.



SECURITY SPECIFICATIONS

1.5 - 7.2 Tonne

40 MPH

**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification

This is an engineered solution based around our current offering of tested products.

PLANTERS



The central band is available in copper or stainless steel and is finished with a satin finish.

MATERIALS / COLOURS

Precious Stone

- Rosso Verona
- Bianco Carrara
- Botticino
- Giallo Mori
- Veneziano
- Porfido
- Verde Alpi
- Nero Ebano

Concrete

White Granite

Grey Concrete

Overall Height Above Ground (mm)	650	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width Ø (mm)	1620	Weight (kg)	1468

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® SATURNO

Available in precious stone or concrete in a range of conglomerate colour variations, Saturno provides a beautiful whilst functional Hostile Vehicle Mitigation solution that doesn't compromise on the aesthetics of a landscaping project.

SECURITY SPECIFICATIONS



**Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification

This is an engineered solution based around our current offering of tested products.

Surfaces can be polished for a shiny finish or bush-hammered, for a rough appearance.


PLANTERS




All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

MATERIALS / COLOURS

Precious Stone

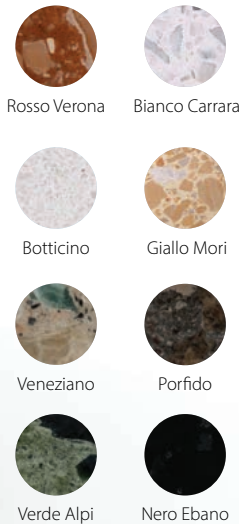

Concrete



Overall Height Above Ground (mm)	1198	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width Ø (mm)	1495	Weight (kg)	2393

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® ESILE

The tapered profile of the Esile planter provides an elegant and contemporary Hostile Vehicle Mitigation solution, facilitating its integration in any environment.

Manufactured with Ultra High Performance Concrete which has been developed in recent decades for its exceptional properties of strength and durability, the Esile planter is freeze resistant and abrasion resistant, offering reduced maintenance and an extended life span.

Esile is available in a range of subtle or outgoing colour options to create a cheerful and vibrant atmosphere.

SECURITY SPECIFICATIONS



**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification

This is an engineered solution based around our current offering of tested products.

PLANTERS

MATERIALS / COLOURS

Ultratense Concrete



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

Overall Height Above Ground (mm)	900	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width Ø (mm)	677	Weight (kg)	279

*Dependent on core selection see page 34 - 35 for options

RHINO GUARD® ORIONE

The Orione planter is the perfect solution to bring timeless style in to urban streetscapes, retail centres and large foyers. Equipped with an internal stainless steel flower vase, the Hostile Vehicle Mitigation planter is offered in precious stone or concrete in various conglomerate shades.



SECURITY SPECIFICATIONS



1.5 - 7.2 Tonne




40 MPH

**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification


This is an engineered solution based around our current offering of tested products.

PLANTERS




MATERIALS / COLOURS


Precious Stone




Rosso Verona




Bianco Carrara




Botticino




Giallo Mori




Veneziano



Porfido




Verde Alpi



Nero Ebano

Concrete



White Granite

All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

Overall Height Above Ground (mm)	816	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width Ø (mm)	520	Weight (kg)	242

*Dependent on core selection see page 34 - 35 for options


RHINO GUARD® PEGASO

Pegaso is a cylindrical shaped planter available in conglomerate precious stone or concrete and is available in a variety of colour options.


Its softly curved profile offers a timeless design for both public and private spaces. Available in a range of security ratings, the planter provides inner strength and outer beauty and will enhance the aesthetics of any environment.

A photograph showing several Pegaso planters in a dark, textured material, each containing a green shrub. They are placed on a paved area in front of a modern building with large glass windows.

SECURITY SPECIFICATIONS



1.5 - 7.2 Tonne




40 MPH

**Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification


This is an engineered solution based around our current offering of tested products.

PLANTERS




MATERIALS / COLOURS


Precious Stone




Rosso Verona




Bianco Carrara




Botticino




Giallo Mori




Veneziano



Porfido




Verde Alpi



Nero Ebano

Concrete



White Granite

All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available.

Overall Height Above Ground (mm)	915	Foundation Type	*Various
Overall Height Including Root (mm)	*Various	Foundation Length x Width x Height (mm)	*Various
Length x Width Ø (mm)	640	Weight (kg)	374

*Dependent on core selection see page 34 - 35 for options

Protective Planters

Landscape Protection

marshalls.co.uk/landscapeprotection

29


RHINO GUARD® STEEL GATEKEEPER®


The RhinoGuard® Steel GateKeeper® provides temporary protective measures for a number of applications such as Christmas markets or sporting events.

The steel variation has been successfully crash tested to IWA 14.1, providing protection against vehicles up to 2.5 tonnes travelling up to 30mph. The tested solution is pedestrian permeable, with vehicle access points and requires no anchorage in any form and can be quickly deployed across all surfaces without relying on kerbs or structural aids.

SECURITY SPECIFICATIONS

IWA14.1


**2.5 Tonne**

**30 MPH**

V2500(N1G)/48/90:5.2 – 11 unit crash test

V2500(N1G)/48/90:11.7 – 5 unit crash test

GateKeeper® is fully galvanised to protect against corrosion and is available with the option of power coating and branded customisation. Providing an ideal solution for use on busy high streets or events.

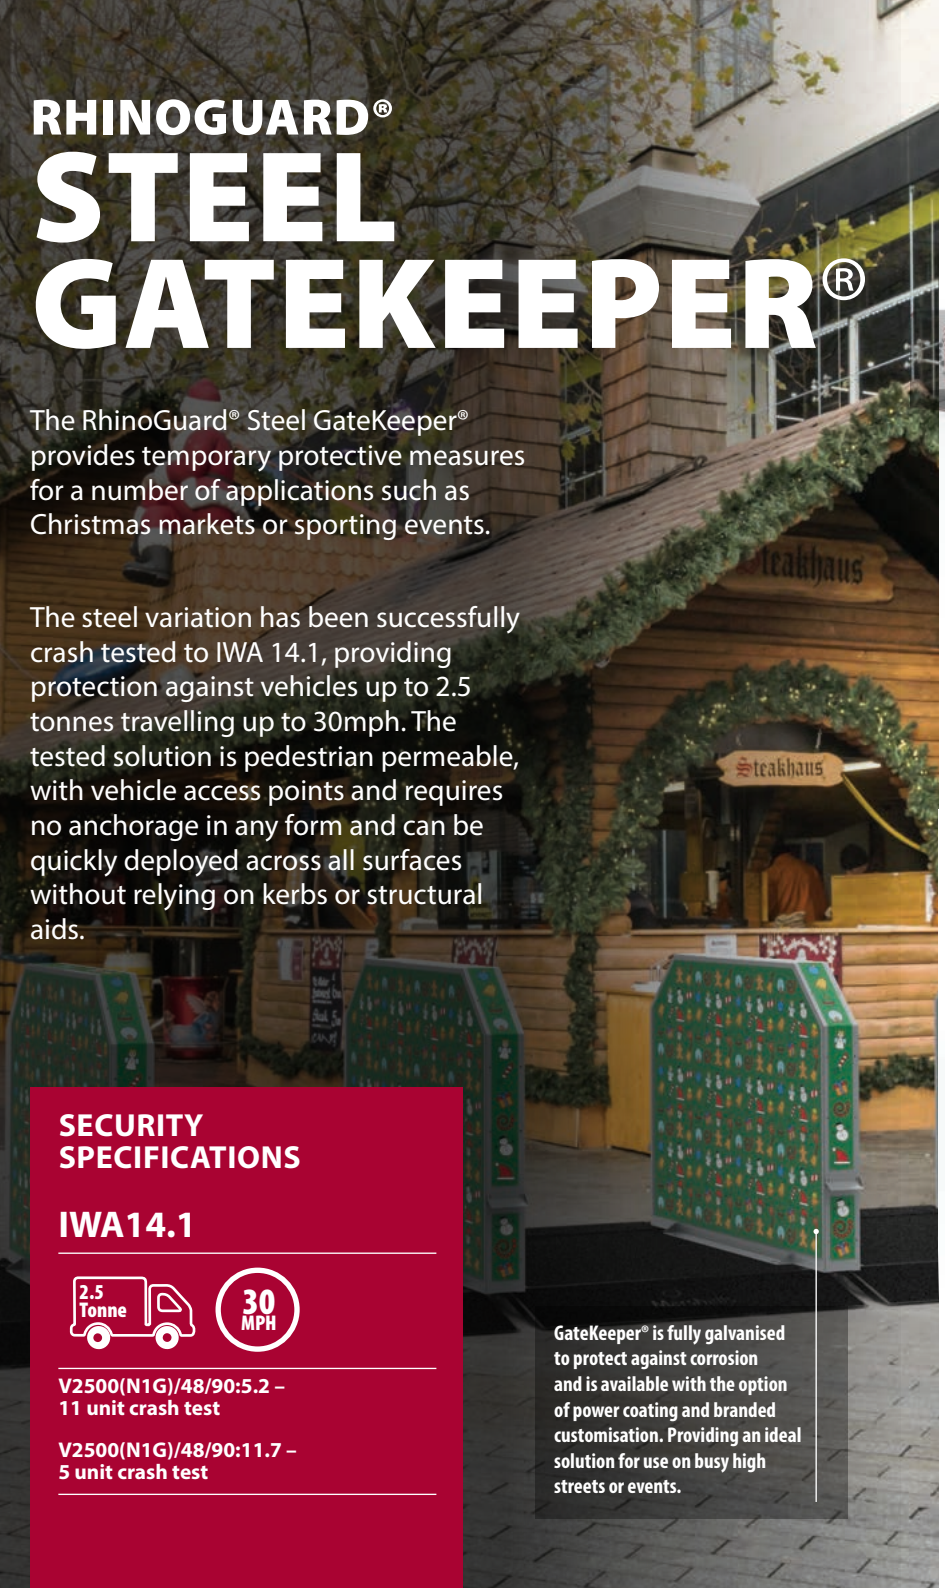


PROTECTIVE TEMPORARY SOLUTIONS



GateKeeper® 'Original' Shroud Design



Brick GateKeeper®
Individual Unit Design

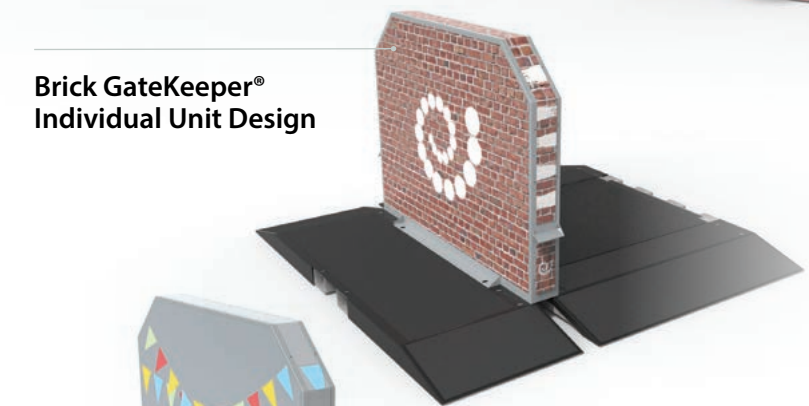

MATERIALS / COLOURS

Standard RAL Powder Coated Colours


RAL 9010


RAL 7045


RAL 9006


RAL 7038


RAL 1023


RAL 6005


RAL 9005


RAL 3020


RAL 9007


RAL 5010


RAL 8014


Festival GateKeeper®
Individual Unit Design



RHINO GUARD® INDIVIDUAL GATEKEEPER® UNIT	
Individual Unit H x L x W (mm)	1093 x 1265 x 1876
Individual Unit Weight (kg)	245

RHINO GUARD® CONCRETE GATEKEEPER®

The pedestrian permeable RhinoGuard® concrete GateKeeper® has been successfully tested to government approved C-VAW standards, which provides proven resistance from ramming vehicles. During the test, different vehicles were used to demonstrate how the system would perform under various attack angles.

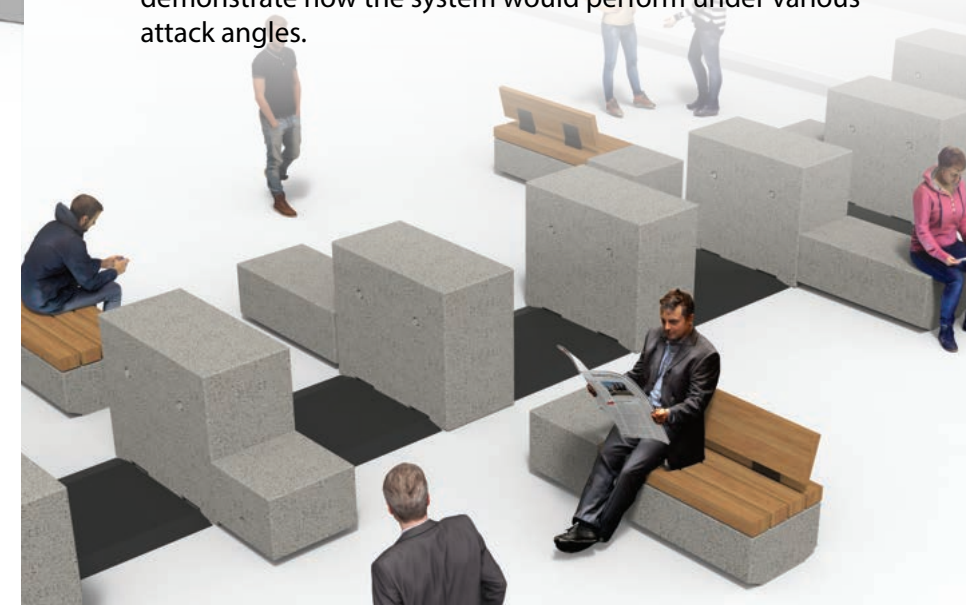


SECURITY SPECIFICATIONS

C-VAW

Tested to C-VAW Standards

This product holds a CPNI Vehicle Attack Delay Standard (VADS) rating

PROTECTIVE TEMPORARY SOLUTIONS

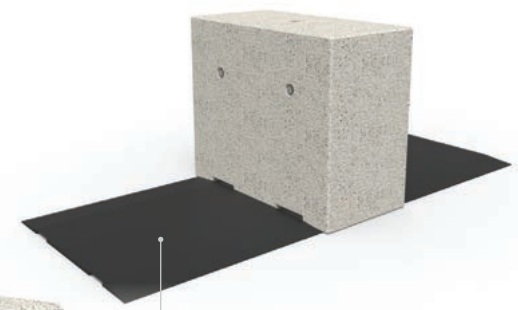

GateKeeper® blocks can be spaced and linked using ramps

RhinoGuard®
Concrete GateKeeper®

Concrete
Raw finish, available in
Silver Grey or Mid Grey

MATERIALS / COLOURS

Concrete



Silver Grey Mid Grey

RHINO GUARD® CONCRETE GATEKEEPER® UNIT	
Individual Unit H x L x W (mm)	1000 x 1200 x 600
Individual Unit Weight (kg)	1981

PROTECTIVE POST & RAIL



Marshalls Landscape Protection offers a range of protective post and rail systems which are available in a variety of styles and materials. We are also able to offer bespoke solutions to suit your requirements. Please get in touch for more information.



STAINLESS STEEL	
Height (mm)	1000
Base diameter	Various based on rating requirements
Standard Fixing	Root Fixed

* Other size sleeves also available.

MILD STEEL	
Height (mm)	1000
Base diameter	Various based on rating requirements
Standard Fixing	Root Fixed

GEO	
Height (mm)	1000
Base diameter	Various based on rating requirements
Standard Fixing	Root Fixed

DECORGUARD	
Height (mm)	1040
Base diameter	Various based on rating requirements
Standard Fixing	Root Fixed

SECURITY SPECIFICATIONS



**Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification



		Core Rating										
Product	Core Security Rating*	15/30	25/10	25/20	25/40	35/30	72/30	72/40	72/50	75/30	75/40	75/50
	Stainless Steel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Mild Steel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Geo	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	DecorGuard	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Test Standards		PAS 68	PAS 68	PAS 68	PAS 68	IWA14.1	IWA14.1	IWA14.1	IWA14.1	PAS 68	PAS 68	PAS 68

*Core Security Rating: For example 15/30 = 1.5 tonne vehicle @ 30mph

RHINO GUARD® PRODUCT OPTIONS

AVAILABLE CORE RATING

The RhinoGuard® range has been designed to fulfil your aesthetic and security needs.

Our RhinoGuard® range of bollards have a wide selection of sleeve options, fixing types and foundation depths available to suit your scheme.

All our cores have been tested from 1.5 tonnes to 7.5 tonnes at various speeds up to 50mph.


PROTECTIVE BOLLARDS



Test Standard	Security Rating*	Core Diameter (mm)	Height Above Ground allowing for finishes (mm)	MILD STEEL	STAINLESS STEEL	FERROCAST®	GEO
PAS 68	15/30	114	865	✓	✓	✓	✓
PAS 170	25/10	75	800	✓	✓	✓	✓
PAS 170	25/20	139	800	✓	✓	✓	✓
PAS 68	25/40	168	865	✓	✓	✓	✓
		168	868	✓	✓	✓	✓
IWA 14.1	35/30	139	900	✓	✓	✓	✓
IWA 14.1	72/30	N/A	787	✓	✓	✓	✓
IWA 14.1	72/40	194	990	✓	✓	✓	✓
IWA 14.1	72/50	244	935	✓	✓	✓	✓
PAS 68	75/30	194	858	✓	✓	✓	✓
PAS 68	75/40	244	1000	✓	✓	✓	✓
		168	1005	✓	✓	✓	✓
PAS 68	75/50	194	1000	✓	✓	✓	✓
		244	1030	✓	✓	✓	✓
*Core Security Rating: For example 15/30 = 1.5 tonne vehicle @ 30mph							

RHINO GUARD® BOLLARDS

The RhinoGuard® bollard range comes with an variety of foundation types, including our RhinoGuard® Ultra Shallow 50™ bollard which only requires a 50mm excavation depth.

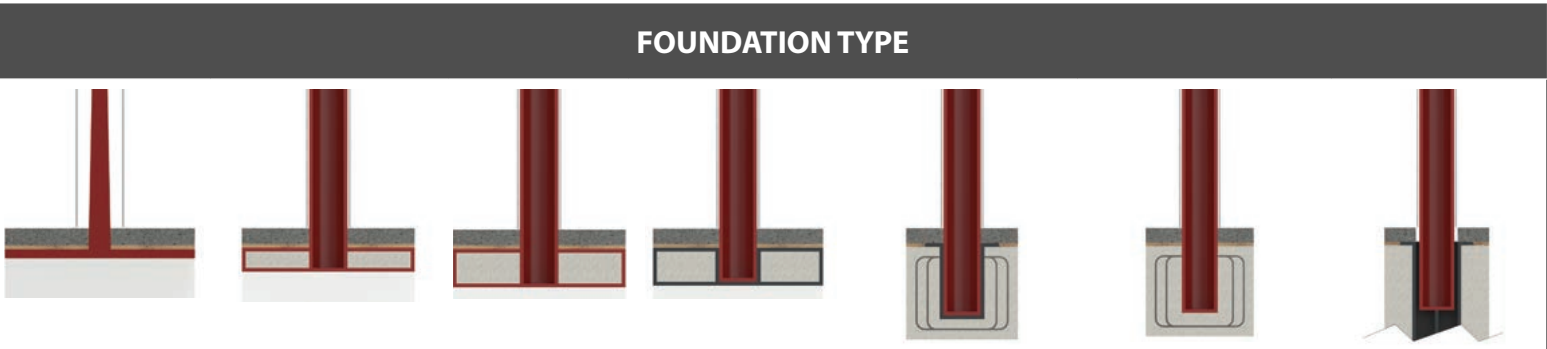

Test Standard	Security Rating	Core Diameter (mm)	Height Above Ground allowing for finishes (mm)	Ultra Shallow 50™ (50mm deep)	Super Shallow 100™ (100mm deep)	Shallow Mount (150-200mm deep)	Shallow Mount Removable (150-200mm deep)	Reinforced Concrete Cage (500-750mm deep)	Removable Reinforced Concrete Cage (500-750mm deep)	Lift Assist (1600mm deep)
PAS 68	15/30	114	865					✓	✓	
PAS 170	25/10	75	800					✓		
PAS 170	25/20	139	800					✓		
PAS 68	25/40	168	865					✓	✓	
		168	868			✓				
IWA 14.1	35/30	139	900					✓	✓	✓
IWA 14.1	72/30	N/A	787	✓						
IWA 14.1	72/40	194	990		✓		✓			
IWA 14.1	72/50	244	935			✓	✓			
PAS 68	75/30	194	858			✓	✓			
PAS 68	75/40	244	1000			✓	✓			
		168	1005					✓	✓	
PAS 68	75/50	194	1000					✓		
		244	1030					✓	✓	


(Please note not all products are available with each foundation, speak to a member of our team for more information)

PROTECTIVE BOLLARDS




RHINO GUARD® DECORATIVE SLEEVES

Diamond Fade




- A** Diamond Fade - RAL 9007 Grey Aluminium + RAL 7016 Al
- B** Diamond Fade - RAL 5011 Steel Blue + RAL 9007 Grey Alu
- C** Diamond Fade - Corten (RT-8286-I) + Bronze (RT-8102-1)
- D** Diamond Fade - Stainless Steel + RAL 5011 Steel Blue

Dubai



- A** Dubai - Stainless Steel + RAL 9007 Grey Aluminium
- B** Dubai - Stainless Steel + RAL 5011 Steel Blue
- C** Dubai - Stainless Steel + Corten Fossil Base (RT-1553)
- D** Dubai - Stainless Steel + Bronze (RT-8102-1)

Flower Burst



- A** Flower Burst - Stainless Steel + RAL 9007 Grey Aluminium
- B** Flower Burst - Stainless Steel + RAL 5011 Steel Blue
- C** Flower Burst - Stainless Steel + Corten Fossil Base (RT-1553)
- D** Flower Burst - Stainless Steel + RAL 7016 Anthracite Grey

MATERIALS / COLOURS

Standard RAL and ADAPTA Powder Coated Colours



Stainless Steel

The decorative outer sleeve is offered in brushed stainless steel as standard but can also be offered in and standard RAL or ADAPTA powder coat.

The inner core is also available in any standard RAL or ADAPTA powder coat.

RHINO GUARD® NATURAL STONE SLEEVES

Choosing natural stone means opting for a unique product. The natural stone bollard sleeves have an authentic, timeless character and provide a durable and sustainable choice.

Available in 5 colour variations, the sleeves are tailored around your requirements and core selection so are available in numerous ratings to suit your scheme.

SECURITY SPECIFICATIONS



**Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification

Chamfer Natural Stone Sleeve
Brackendale (shown)

PROTECTIVE BOLLARDS



Chamfer Natural Stone Sleeve

Laurel Bank

Sleeves tailored around selection of bollard core.



Fillet Natural Stone Sleeve

Thornlake


NATURAL STONE SLEEVES

Height (mm)	Assorted sizes
Diameters (mm)	Assorted sizes

Sleeve size is tailored around the bollard core selected.

MATERIALS / COLOURS

Indian Sandstone - Natural Stone



PROTECTIVE

BOLLARDS

RHINO GUARD®

BESPOKE SLEEVES

Utilising the experience and knowledge of our team of design engineers, we can develop bespoke sleeve styles in a range of materials and colour options to meet the requirements of any project.

Our design experience and production expertise are your guarantee of success. We strive to offer a unique service that supports you from your first concept sketches right through to installation of the finished product.


Please get in touch if you would like more information.



Valentines Bespoke Bollards



Antony Gormley Bollards

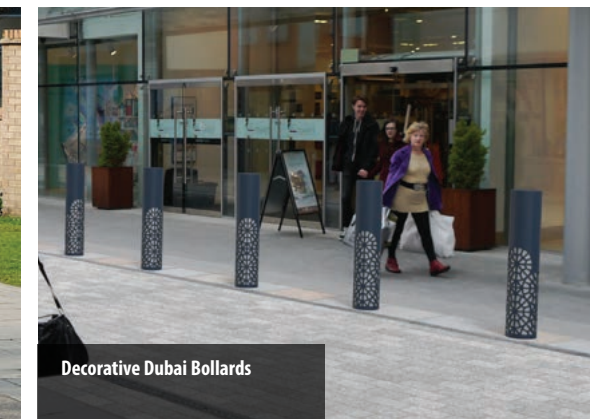

Decorative Dubai Bollards



Pipencil Bollards

We promise to bring your vision to life through our **bespoke product solutions service.**




Cristina Planters (Engineered Solutions)



Orione Planters (Engineered Solutions)



Billy & Belinda Bollards

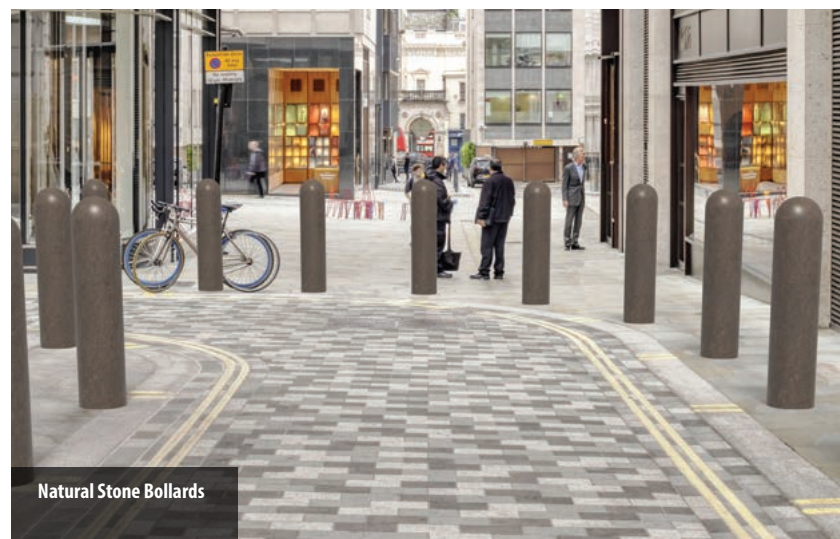

Natural Stone Bollards



Contemporary Ferrocast® Bollards



Bespoke Designed Bollards



Rugby Bespoke Bollards



Sloped Bollards

RHINO GUARD® ULTRA SHALLOW 50™

Requiring just a 50mm excavation depth, the RhinoGuard® Ultra Shallow 50™ is the perfect solution for use on bridges and other areas where underground service and utilities affect installation.

The bollard series has been successfully crash tested in two different foundations under the IWA-14.1 standard and is capable of stopping a 7.2 tonne vehicle travelling at 30mph.



SECURITY SPECIFICATIONS

IWA14.1

7.2 Tonne

30 MPH

V/7200(N2A)/48/30:1.1
Footpath foundation impact test

V/7200(N2A)/48/30:1.1
Cycleway foundation impact test

Westminster sleeve (shown)


BOLLARDS



Along with the Westminster style Ferrocast® sleeve design and the standard mild and stainless steel options, the slim profile of the bollard core allows for a varied choice of sleeves.



Sloped Stainless Steel sleeve

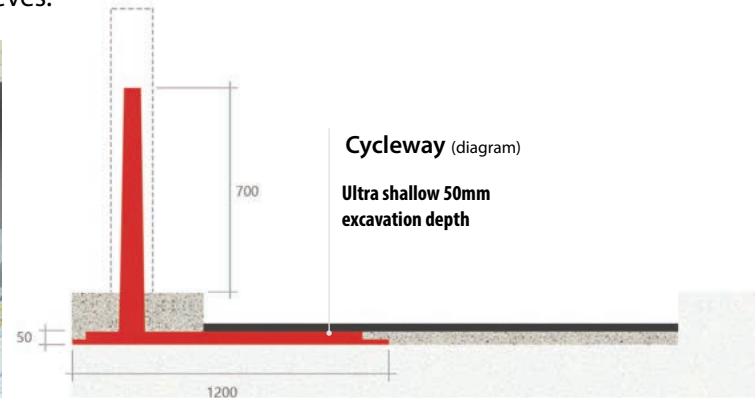


Cycleway (diagram)

Ultra shallow 50mm excavation depth

Bollard Core

Mild Steel Galvanised finish, several sleeve options available.

- Mild steel
- Stainless steel
- Ferrocast®
- Bespoke designs

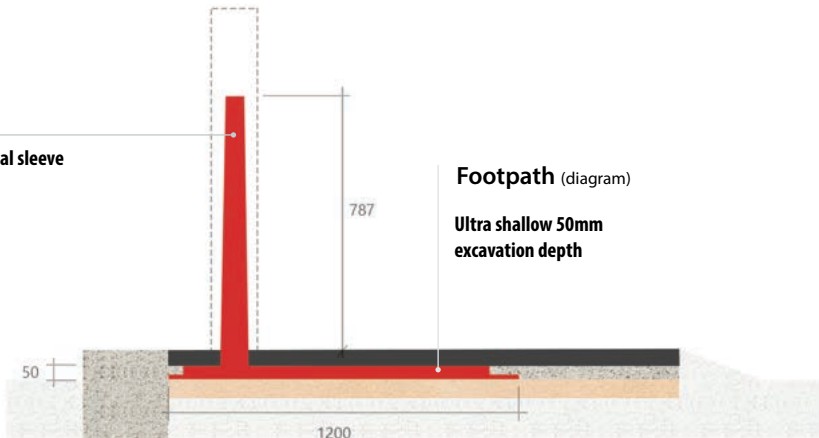

Footpath (diagram)

Ultra shallow 50mm excavation depth

MATERIALS / COLOURS



Mild Steel


Also available with Standard RAL Powder Coated Colours See page 30

Overall Height Above Ground (mm)	700 (cycleway) 787 (footpath)	Foundation Depth (mm)	50
Width x Depth (mm)	200 x 100	Weight (kg)	390

RHINO GUARD® SUPER SHALLOW 100™

As the Super Shallow 100™ requires little excavation, the bollard series makes the perfect solution to use in areas with high utilities or services. Additionally, the level of waste during install is minimal.

The slim profile of the bollard core means a varied choice of sleeve designs and material options are also offered with the Super Shallow 100™. With a breadth of aesthetic choices available, the bollards can either blend in with the surrounding environment or can create a unique design feature in any space. The tapered design of the core also means that bespoke designs can be achieved to compliment schemes, events or branding.

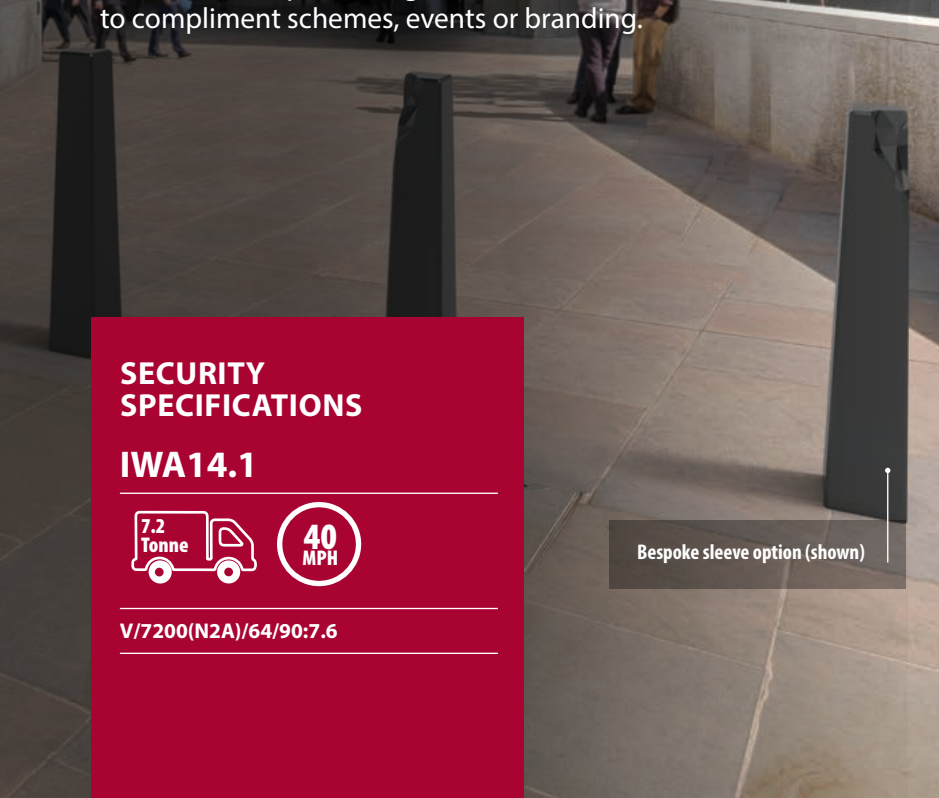

Bespoke sleeve option (shown)

SECURITY SPECIFICATIONS

IWA14.1



V/7200(N2A)/64/90:7.6

BOLLARDS



Both the Ultra Shallow™ and the Super Shallow™ core bollard elements can also be incorporated in to our seating, cycle stands, lighting, handrails and wayfinding solutions, offering a variety of innovative and protective design solutions to meet a range of requirements.

Internal Bollard Core

Is a Mild Steel Galvanised finish

Outer sleeve

Several sleeve options available.

- Mild steel
- Stainless steel
- Ferrocast®
- Bespoke designs



MATERIALS / COLOURS



Mild Steel

Also available with Standard RAL Powder Coated Colours See page 30

Overall Height Above Ground (mm)	995	Foundation Depth (mm)	100
Width x Depth Ø (mm)	194	Weight (kg)	520

RHINO GUARD® STANDARD SLEEVE OPTIONS

Standard sleeve designs are available in mild steel, stainless steel and Ferrocaster polyurethane and can be specified with reflective banding for increased visibility and safety.

Bespoke design commissions for other styles and finishes can also be accommodated on request. Please see page 34 - 39 for more information.

SECURITY SPECIFICATIONS

7.5 Tonne

50 MPH

**Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification

Contemporary Ferrocaster® Sleeve (shown)

BOLLARDS



Stainless Steel sleeves
Brushed



GEO Stainless Steel sleeves
Bead Blasted with Polished Top Cap



LED Marker sleeves
Stainless Steel - Brushed



Steel sleeves
Galvanised & Powder Coated



Manchester Ferrocaster® sleeve
Painted Polyurethane – Standard RAL colours available



Contemporary Ferrocaster® sleeve
Painted Polyurethane – Standard RAL colours available

STAINLESS STEEL SLEEVES

Height (mm)	1000
Diameters Ø (mm)	168, 194, 204, 273

GEO STAINLESS STEEL SLEEVES

Height (mm)	1000
Diameters Ø (mm)	129, 154, 204, 256

LED MARKER SLEEVES

Height (mm)	1000
Diameters Ø (mm)	140, 204, 254

STEEL SLEEVES

Height (mm)	1100
Diameters Ø (mm)	140, 204, 254

FERROCAST® SLEEVES

Height (mm)	Assorted sizes
Diameters Ø (mm)	Assorted sizes

Sleeve size is tailored around the bollard core selected.

RHINO GUARD® 25/10 AND 25/20 PAS 170 CORES

Able to withstand the force of a 2.5-tonne vehicle driving at up to 10mph or 20mph, the RhinoGuard® PAS 170 cores are an excellent choice for protecting public spaces, providing assurance against lower speed ram-raids and impacts.

The certified steel cores are available with a choice of standard and bespoke sleeve options.

SECURITY SPECIFICATIONS

PAS170 - 25/10




IT/2500/16/90:0.8

PAS170 - 25/20




IT/2500/32/90:2.0

BOLLARDS

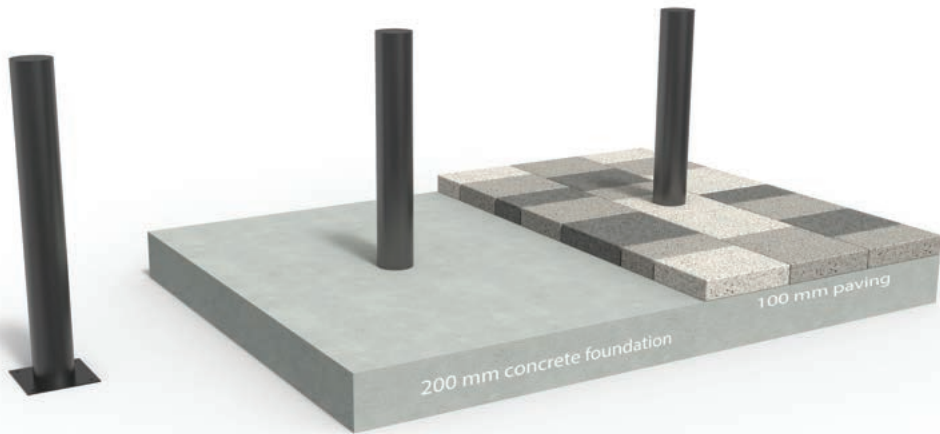

MATERIALS / COLOURS

Standard RAL Powder Coated Colours

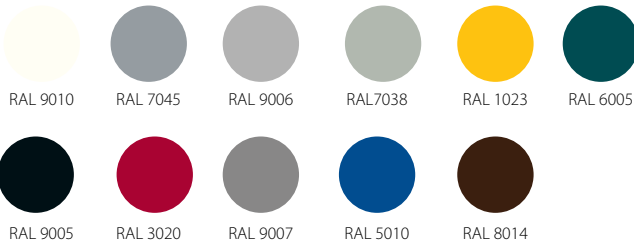

Available with a range of standard an bespoke sleeve options , please see pages 34-39

FINISH

Galvanised Mild Steel with the option of powder coating.

PAS 170 25/10 (2.5 tonne at 10mph)	Diameter (mm)	75	PAS 170 25/20 (2.5 tonne at 10mph)	Diameter (mm)	140
	Overall Height Above Ground (mm)	800		Overall Height Above Ground (mm)	800
	Overall Height Including Root (mm)	1100		Overall Height Including Root (mm)	1100
	Foundation Type	Root Fixed		Foundation Type	Root Fixed
	Foundation Length x Width x Height (mm)	4080 x700 x 300 (Inc cover)		Foundation Length x Width x Height (mm)	4080 x700 x 300 (Inc cover)
	Weight (kg)	45		Weight (kg)	55

RHINO GUARD® GEO

The coordinated GEO range with integrated RhinoGuard® Protective Technology reflects the best of modern urban design: simplicity, sustainability and robust materials in a low profile form.

Manufactured using a bead blasted grade 316 stainless steel, the GEO products are exceptionally strong and require very low maintenance.



SECURITY SPECIFICATIONS

7.5 Tonne

50 MPH

**Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification

PROTECTIVE STREET FURNITURE



Geo Litter Bin
Stainless Steel / Brushed Satin



Geo Cycle Stand
Stainless Steel / Brushed Satin

MATERIALS / COLOURS



Stainless Steel

GEO LITTER BIN

Overall Height Above Ground (mm)	1100
Foundation Root Depth (mm)	500
Surface Finishing (mm)	100
Overall Length (mm)	1700
Core Diameter Ø (mm)	*Various
Sleeve Diameter Ø (mm)	204
Bin Diameter Ø (mm)	500
Weight (kg)	46

GEO CYCLE STAND

Overall Height Above Ground (mm)	1100
Foundation Root Depth (mm)	500
Surface Finishing (mm)	100
Overall Length (mm)	1700
Overall Width (mm)	1132
Core Diameter Ø (mm)	*Various
Sleeve Diameter Ø (mm)	204
Weight (kg)	238

*Various bollard cores available depending on security rating required.

PROTECTIVE AUTOMATED PRODUCTS



Reflective Banding Options



LED Lighting Options

MATERIALS / COLOURS



Stainless Steel

Standard RAL Powder Coated Colours



RAL 9010



RAL 9006



RAL 9007



RAL 9045



RAL 9005



RAL 6005



RAL 3020



RAL 1023




RAL 5010



RhinoGuard® Automated Bollards



RhinoGuard® Automated Blockers

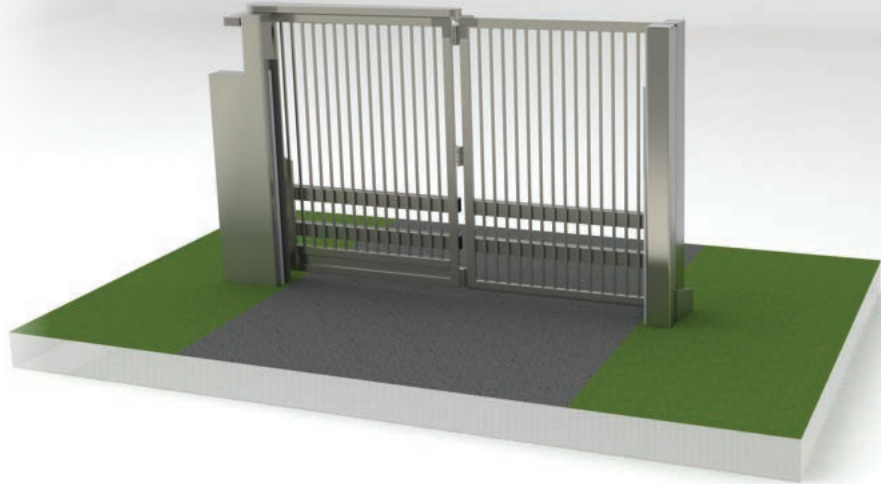

RhinoGuard® Automated Gates

AUTOMATED BOLLARDS

Height (mm)	Max 100
Base Diameter Ø (mm)	Max 350
Std Fixing Type	Root Fixed

AUTOMATED BLOCKERS

Height (mm)	Max 1100
Width (mm)	Max 4000
Std Fixing Type	Root Fixed

AUTOMATED GATES

Height (mm)	2400
Width (mm)	4200
Std Fixing Type	Root Fixed

* Heights and widths vary depending on rating options. Other options available, please speak to a member of our team about your automated product requirements.

SECURITY SPECIFICATIONS



**Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification

RHINO GUARD® REDI-ROCK™

The Redi-Rock™ HVM wall is proven to stop a 7.5 tonne truck at 30mph and is an effective, removable solution that requires minimal maintenance. Interconnected with steel cables and with no ground anchors required, the fast-to-install freestanding blocks can be deployed, picked up and moved with no ground work required making this solution ideal for use in crowded places, transport hubs, utility and critical infrastructure as well as buildings of high importance. Due to its natural stone appearance Redi-Rock™ blends into the background and is aesthetically pleasing, protecting its surrounding without looking out of place.

SECURITY SPECIFICATIONS

PAS68



2007V/7500(N2)/48/90:1.6/0.0



MODULAR SOLUTIONS

The Redi-Rock™ system is also available as a standard walling system for the retention of earth, landscaping and flood protection applications. For more information on this system please contact a member of the team.



MATERIALS / COLOURS



Height (mm)	Variable
Fixing Type	Freestanding

RHINO GUARD® TITAN® KERB

The RhinoGuard® Titan® Kerb is a high containment solution designed to keep vehicles on their intended path, and to prevent the overrun of vulnerable areas adjacent to the carriageway via a physical and visual barrier.

The 400mm high Titan® Kerb not only offers clear visual delineation between trafficked and non-trafficked areas, it also ensures that any errant traffic is safely redirected back onto its intended path. The product is an essential tool for designers, acting as a passive system that protects vulnerable installations like pedestrian refuges.

SECURITY SPECIFICATIONS


IWA14.1



V/1500[M1]/80/20:0.2

	External Radius										Internal Radius				
	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400
Height (mm)	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400
Face Length (mm)	965/975	955/975	945/975	935/975	797/841	734/785	807/884	317/394	217/294	975/955	975/935	836/785	961/884	589/666	
Width (mm)	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390
Radius Covered (m)	76/25	25/15	15/11	11/8.5	7.5	6.0	4.5	2.0	1.5	76/25	76/25	76/25	76/25	76/25	76/25
No per 1/4 circle	122-40	40-24	24-18	18-14	14	12	8	8	8	122-40	122-40	122-40	122-40	122-40	122-40
Weight (kg)	233	232	230	229	207	194	221	104	80	232	229	182	198	132	

MODULAR SOLUTIONS

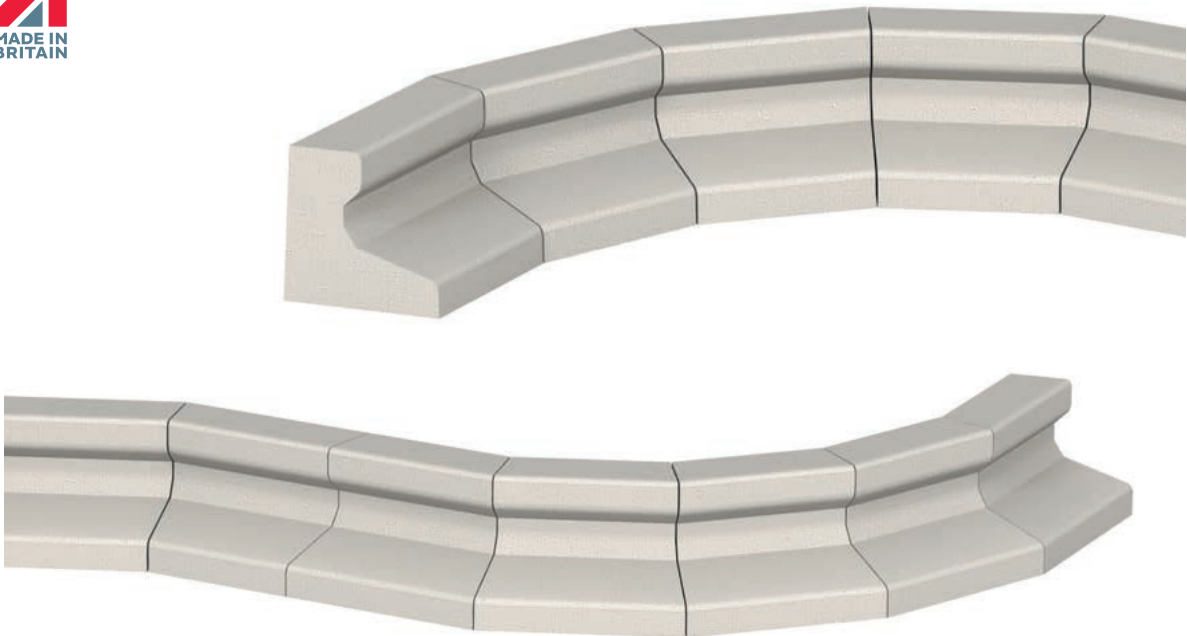

MATERIALS / COLOURS



Smooth Grey

AESTHETICALLY PLEASING LANDSCAPE PROTECTION IS THE WAY FORWARD...



Public Square



Public Square

Installing protective measures to defend public spaces against vehicle-borne terror attacks or accidental collisions has traditionally been viewed as a necessary evil in areas such as city centres, stations and sporting venues. This has led to a tendency to give minimal consideration to how these measures fit with the aesthetics of the surrounding environment. Too often, the result is ugly, obtrusive installations that remind people of the threat that exists, potentially putting them off from visiting and enjoying public spaces.



Public Square



Sports Stadium

We design and build protective street furniture that blends in seamlessly with the landscape. Our approach enables architects, planners and designers to secure spaces without instilling fear.



Retail Park



Retail Park

OUR MANTRA IS TO KEEP
PEOPLE **SAFE... NOT
SCARED.**

Our RhinoGuard® products are all Secured by Design which means they have all been subject to rigorous testing and have been fully certificated by an independent, third-party certification body.

Secured by Design have many partner organisations, ranging from the Home Office, local authorities, housing associations, developers and manufacturers. Working closely with standards and certification bodies, Secured by Design ensures that publicly available standards actually meet the needs of the police and public alike.



Transport Link

DESIGN

DESIGN & ENGINEERING CAPABILITY

IF YOU CAN'T FIND WHAT YOU NEED...

within the Marshalls Landscape Protection range, **your options don't end there.**

Our specialist design and engineering teams are experienced in a range of materials from natural stone and concrete to mild steel, stainless steel and timber.


Only by consistently pushing boundaries and challenging convention can we create public spaces that stand out.

With every element sourced, tailored or created around your project vision, our theoretical and practical understanding of urban space is unrivalled.

Our exceptional bespoke products often start with a flash of inspiration that needs to be fully explored and carefully nurtured throughout the project.

We love to stretch our creativity beyond the typical. Inspired by your vision, ambition and aspiration our open-minded approach means:

'We will where others won't.'

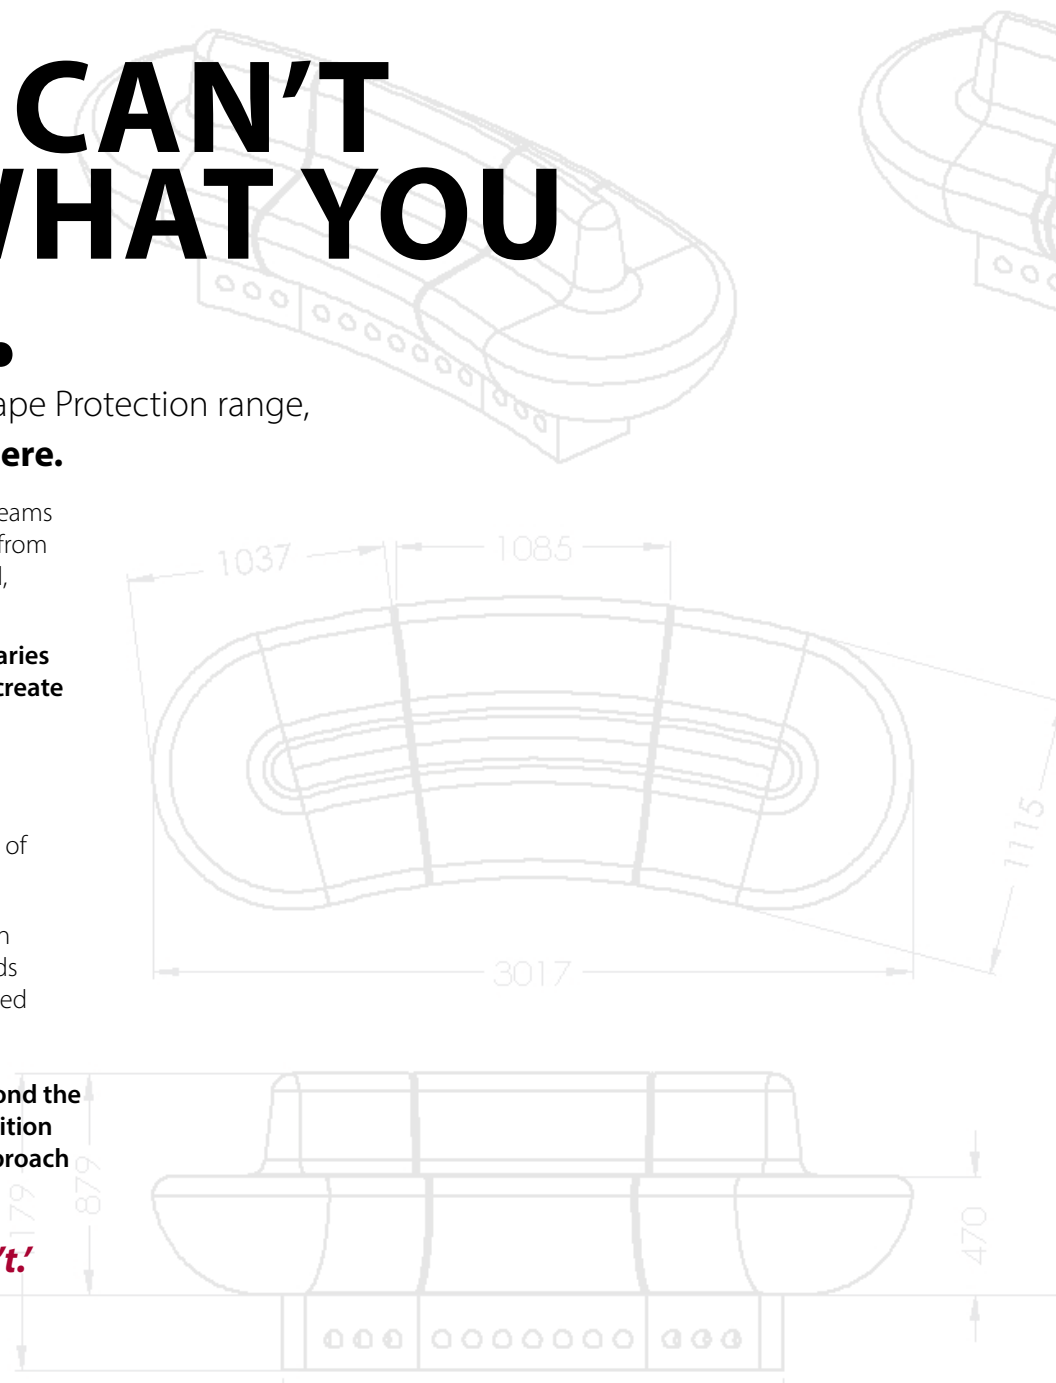

PROJECT

MANAGEMENT



To ensure projects run smoothly, **Marshalls follow a structured 7 STEP approach led by a dedicated Project Manager** from the initial programme of works through to the site inspection and project handover.

01 PROJECT MANAGER ALLOCATED

A specialist project manager is allocated to the client giving a single point of contact from initial project scoping through to installation and handover.

02 PROVISIONAL PROGRAMME

Working alongside the client, the dedicated Project Manager will detail a provisional programme of works considering site conditions, site programme, contractual implications and health and safety.

03 SITE SURVEY

If a site survey is required, it will be conducted by a fully qualified member of the Marshalls team, following which the client will be provided with layout drawings for approval.

04 DESIGN

Following layout approval, product specification drawings will be issued and prototype products can be provided within this stage for certain bespoke projects.

05 FINAL REVIEW

Product design and project time-frames are confirmed in preparation for commencement of works.

06 INSTALLATION

Installation conducted by a specialist Marshalls Landscape Protection install team working in collaboration with the Project Manager.

07 PROJECT HANDOVER AND O&M

Project Manager to lead a site inspection and final evaluation with the client.

HOSTILE

VEHICLE MITIGATION SECURITY ACCREDITATIONS EXPLAINED

At the heart of Hostile Vehicle Mitigation are the BSI **Publicly Available Specifications (PAS)** and **International Workshop Agreements (IWA)**. These have changed how security products are crash tested, designed and procured in order to protect people and places from hostile vehicle attacks, criminal activity and accidental damage.

All accreditations, overseen by the **British Standards Institution (BSI)**, are designed for impact testing and rating **Hostile Vehicle Mitigation (HVM)** measures, such as bollards, blockers, planters, seating and barriers used for security and counter-terrorism purposes.

Measures crash-tested to the strongest specification under **PAS 68** and **IWA 14.1** can stop a 30 tonne vehicle travelling at 50mph. They can be built to withstand different levels of energy from an impact depending on the risk assessment, commonly referred to as a **Vehicle Dynamic Assessment (VDA)**.

PAS 68

Developed in 2005, the Publicly Available Specification, **PAS 68** became the first UK impact test specification and has undergone several reviews since, the most recent taking place in 2013.

PAS 68, specifies a performance classification for vehicle security barriers and their foundations when subjected to a horizontal impact.

The standard was devised and administered by the Centre for the Protection of National Infrastructure (CPNI), and tests security barriers at varying speeds, using different sized vehicles. Whilst it is only through specifying products successfully tested in accordance with **PAS 68** that protective security can truly be assured, this does not necessarily mean that the highest specifications of **PAS 68** protection are always required.

PAS 69

BSI PAS 68 is complemented by the **PAS 69** document, which provides guidance on the selection, installation, foundations and use of **PAS 68** tested security products, taking into account site specific conditions, to ensure they are placed as effectively as possible.

PAS 69 suggests a maximum gap of 1.2m between the installed, upright faces of successive security products, to ensure that vehicles are prevented from encroaching freely between the barriers.

PAS 170

PAS 170 delivers a testing standard for vehicles of up to 2.5 tonnes travelling at 10 or 20mph. Lower than the regulations developed to mitigate against vehicle born terror attacks.

Unlike previous anti-ram solutions, new products tested and certified by **PAS 170** provide businesses and local authorities with assurance and proof of performance for the first time.



RhinoGuard® Glove Planter crash test

IWA 14.1

IWA 14.1 is the global standard which has been developed directly from **PAS 68** and has become the preferred accreditation of the two.

No matter where you are based or where you want to create a safe and beautiful space, the IWA workshop agreement standardises all counter terrorism impact testing agreements and models and combines them into one, making the testing and specification of products easier and clearer for all specifiers.

IWA 14.2

IWA 14.2 provides guidance for the selection, installation and use of vehicle security barriers (VSBs) and describes the process of producing operational requirements (ORs).

IWA 14.2 also gives guidance on a design method for assessing the performance of a VSB.

C-VAW

C-VAW testing is a government approved approach to proving a product's resistance from a ramming vehicle attack. Various vehicles are used to see how the system will perform from other attacks including angular and driving at gaps between the products



Vehicle Speed km/h (mph)	VEHICLE MASS (KG)							
	Used for PAS 68 & IWA14 impact testing	Used for PAS 68 & IWA14 impact testing	Used for PAS 68 & IWA14 impact testing	Used for PAS 68 impact testing	Used for IWA14-1 impact testing	Used for PAS 68 impact testing	Used for IWA14-1 impact testing	Used for PAS 68 & IWA14 impact testing
16 (10)	15	25	35	74	71	74	71	296
32 (20)	59	99	138	296	284	296	284	1185
48 (30)	133	222	311	667	640	667	640	2667
64 (40)	237	395	553	1185	1138	1185	1138	4741
80 (50)	370	617	864	1852	1778	1852	1778	7407
96 (60)	533	889	1244					
112 (70)	726	1210						

The table above provides the kinetic energy values (in kJ) created on impact, for each of the vehicle types and speeds used in PAS 68 & IWA 14.1 impact testing.

INTERNATIONAL








STANDARDS COMPARISON

Over the last 15 years the Hostile Vehicle Mitigation testing standards have progressed and now more than one standard is used globally.

The table below shows comparisons between the USA and international testing standards.

For further information please contact the Marshalls Landscape Protection team on: **+44(0) 1422 312 993.**



Vehicle Speed km/h (mph)	VEHICLE MASS EQUIVALENTS (kg) AND VEHICLE CLASS UK (IWA/ PAS TESTING) / USA (ASTM TESTING)						
	 1.5 tonne Saloon Car (M1) 1500 – PAS/ IWA 1100 – ASTM	 2.5 tonne 4x4 Pickup (N1G) 2500 – PAS/ IWA 2300 (P) – ASTM	 Empty 18 tonne 2 Axle Lorry (Weighs 7.5 tonnes - N3) 3500 – PAS/ IWA/ ASTM	 Empty 18 tonne 2 Axle Lorry (Weighs 7.5 tonnes - N3) 7200 (N2) – IWA/ ASTM	 Empty 18 tonne 2 Axle Lorry (Weighs 7.5 tonnes - N3) 7500 (N3) – PAS 6800 (M) – ASTM	 30 tonne 4 Axle Lorry (N3) 30000 – PAS/ IWA 29500 (H) – ASTM	 Empty 18 tonne 2 Axle Lorry (Weighs 7.5 tonnes - N3) OLD USA K RATING TEST
16 (10)	15	25	35	71	74	296	
32 (20)	59	99	138	284	296	1185	
48 (30)	133	222	311	640	667/656	2667/2850	K4*
64 (40)	237/179	395/375	553	1138	1185/1110	4741/4810	K8*
80 (50)	370/271	617/568	864	1778	1852/1680	7407/7283	K12*
96 (60)	533/424	889/887	1244				
112 (70)	726	1210					

(International /USA) * old USA K rating tests which use a 6800 (M) vehicle.
The table above provides the kinetic energy values (in kJ) created on impact, for each of the vehicle types and speeds used in IWA, PAS and ASTM impact testing.
All test standards use a similar array of vehicles and speeds for testing and therefore deliver similar energy in terms of kilojoules (kJ).

SECURITY


RATINGS EXPLAINED

The International (IWA14.1), UK (PAS 68) and USA (ASTM2656) test standards are defined with a specific rating which includes the vehicle type, test mass and vehicle speed, together with the penetration distance.

PAS 68 AND IWA 14.1

PAS 68 performance rating example: Fixed Bollard V/7500(N2)/48/90:2.5/1.2
IWA14.1 performance rating comparison example: Fixed Bollard V/7500(N2)/48/90:2.5


The PAS 68 and IWA14.1 classification is set out with a row of letters, symbols and numbers that indicate the specification that the product has been tested to. The key difference between the IWA14.1 rating and the PAS 68 is that with IWA14.1 the debris dispersion is not included.

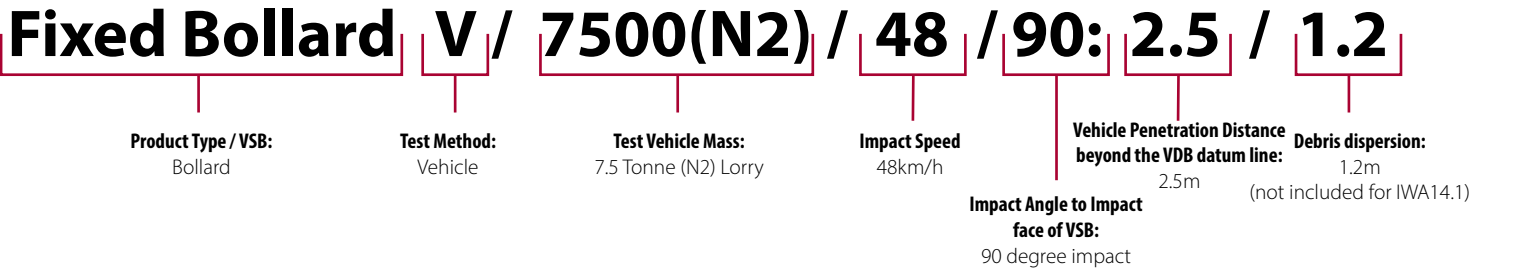

ASTM 2656

ASTM 2656 is the USA testing standard which has grown from the original K ratings standard.

ASTM 2656 performance rating example: M 50 P1

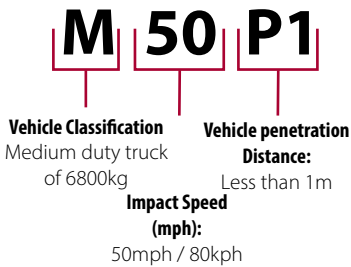



Vertrieb in der Schweiz:
Distribution en Suisse:
Distribution in Switzerland:



designed for security

Consel Group AG
Brunastrasse 185
8951 Fahrweid
Schweiz

Tel. 043 277 83 00
Fax 043 277 83 01

sales@consel.ch
www.conselgroup.com